



75X300MM

3X12 INCH

CERAMIC WALL TILE

CAPTIVA (GLOSSY)



CAPTIVA

Experience the allure of charismatic tiles, delivering not only functional aesthetics but also an everlasting charm that enhances your space with a contemporary ambiance, making it truly exceptional.

CERAMIC WALL TILE

75X300MM




CAPTIVA
SMERALDO

75X300MM


Unearth the excellence of the glossy surface
from Starco's 75X 300mm Collection

OFFICE | HOTEL | MALL | DOMESTIC

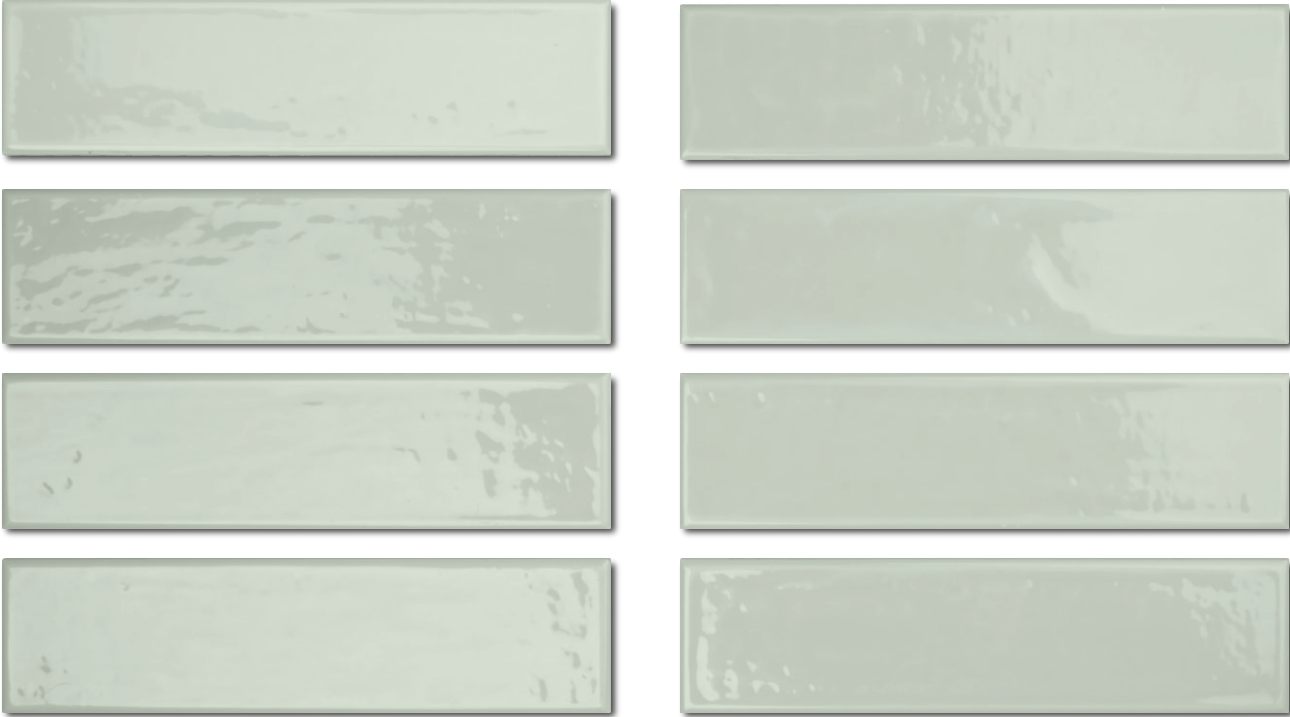

8 RANDOM WALL GLOSSY

PUNCH / **CAPTIVA**








CAPTIVA
AZZURO

75X300MM

Starco has you covered with an exceptional range
of surfaces that lends a statement to your spaces

OFFICE | HOTEL | MALL | DOMESTIC

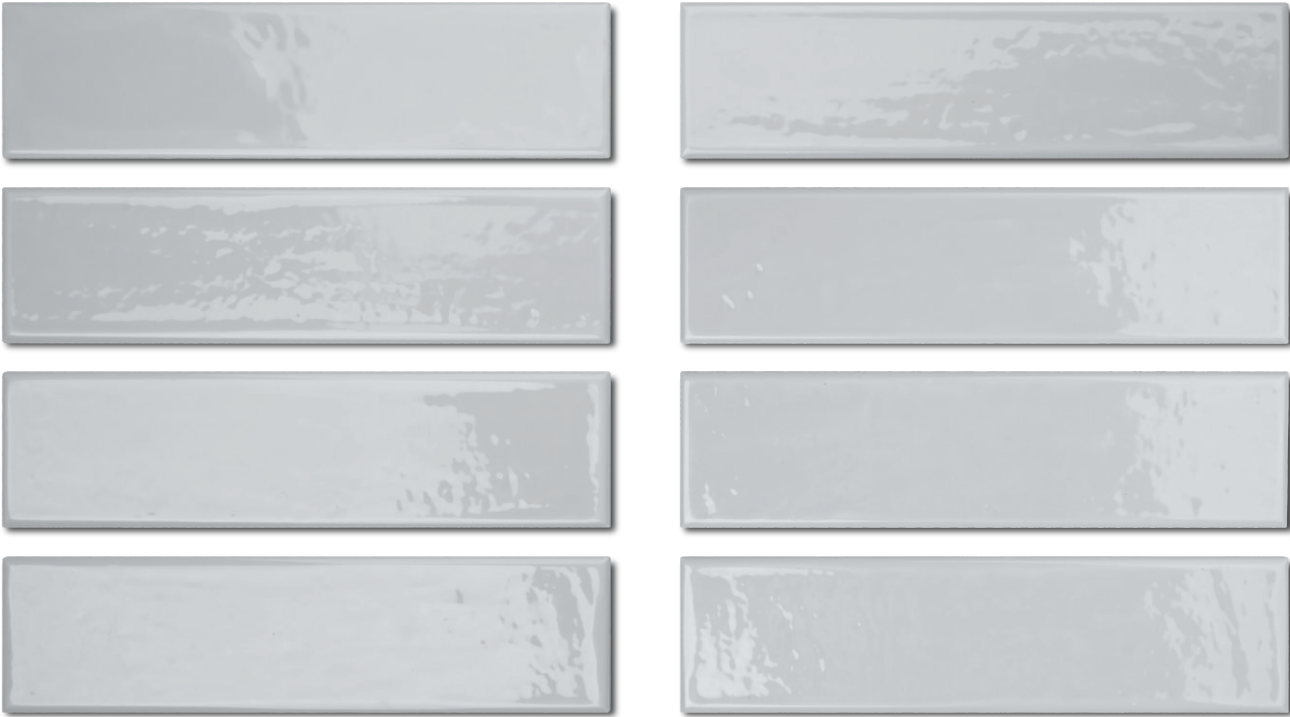

8 RANDOM WALL GLOSSY

PUNCH / CAPTIVA








CAPTIVA

BIANCO SPORCO

75X300MM

Elevate your space with the captivating symmetry that introduces new dimensions and modern concepts

OFFICE | HOTEL | MALL | DOMESTIC

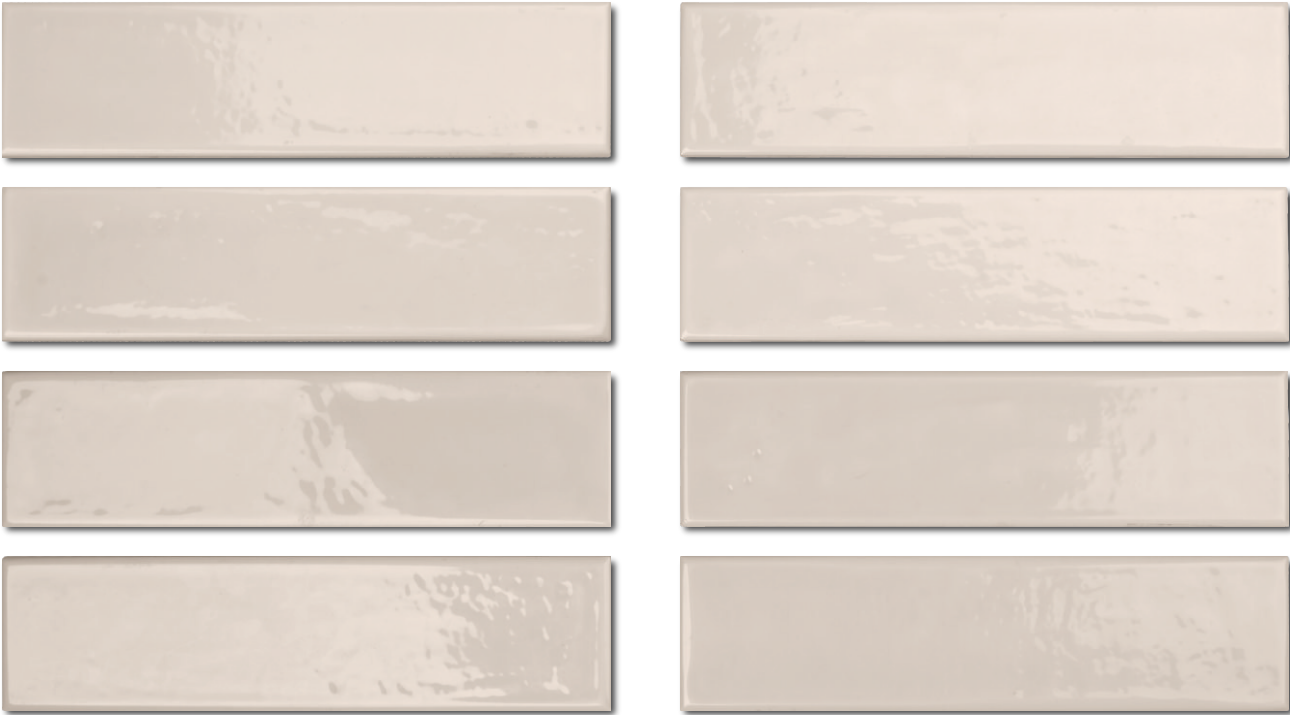

8 RANDOM WALL GLOSSY

PUNCH / CAPTIVA








CAPTIVA

GRIGIO CHIARO

75X300MM

Bring your space with the dynamic harmony
of textures and shades, inspired by the allure of Starco

OFFICE | HOTEL | MALL | DOMESTIC

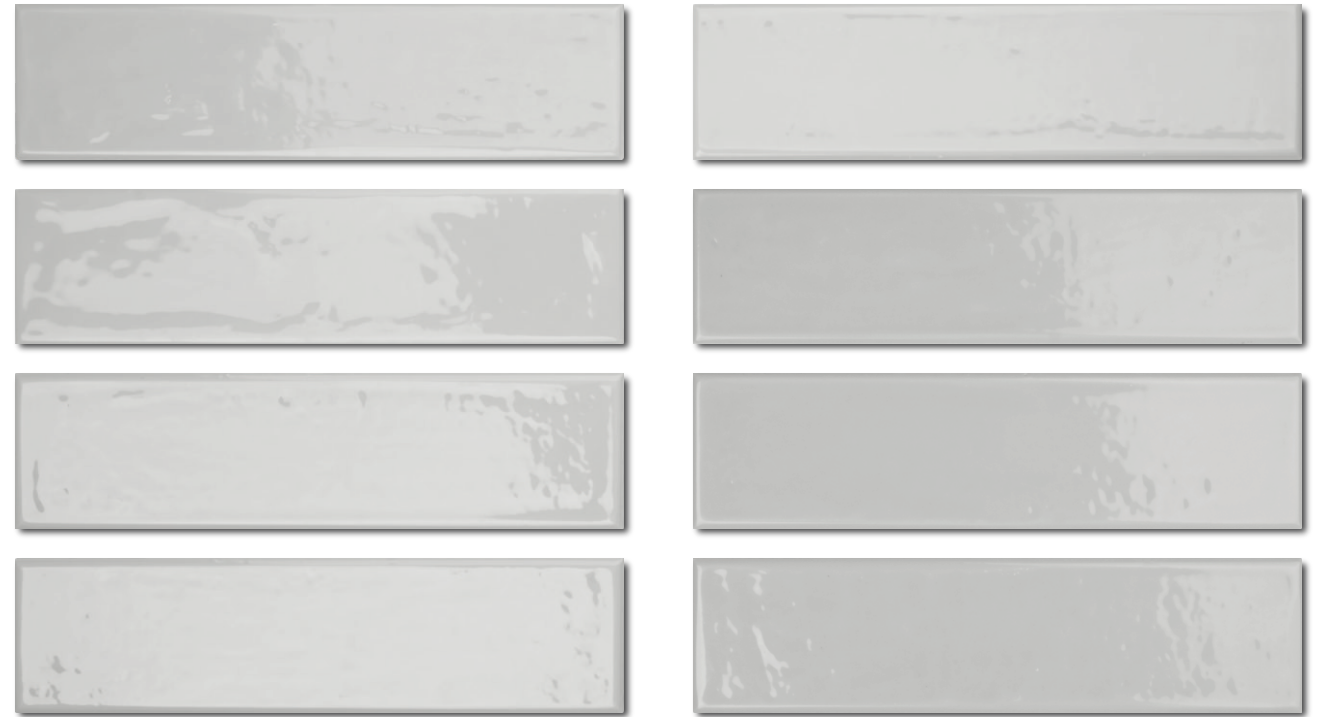

8

RANDOM




WALL



GLOSSY

PUNCH / **CAPTIVA**








75X300MM


Bring your space with the dynamic harmony
of textures and shades, inspired by the allure of Starco

OFFICE | HOTEL | MALL | DOMESTIC

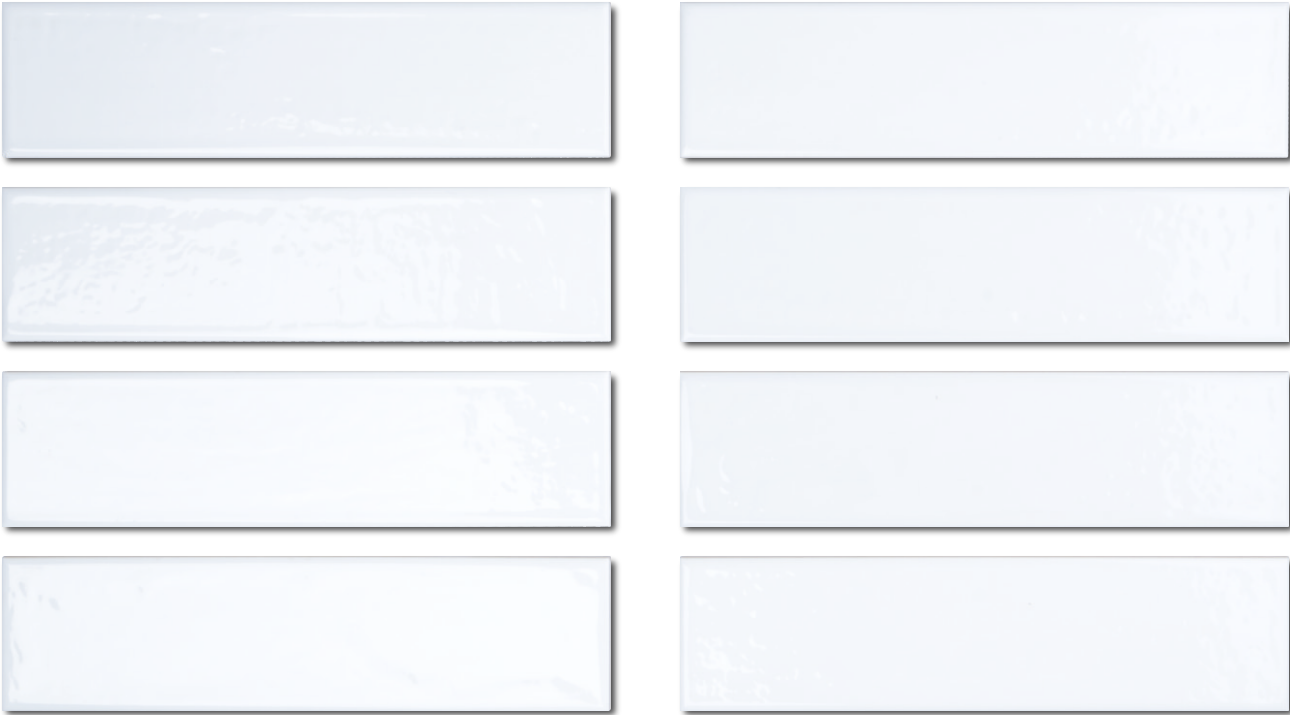

8 RANDOM WALL GLOSSY

PUNCH / CAPTIVA





TECHNICAL SPECIFICATION as per ISO 13006:2018 – ANNEXL

Sr.No.	Property	International Std.	OUR Tiles Value	Method of Testing
1	Deviation in Length and Width	± 0.6%	± 0.10%	ISO-10545-2
2	Deviation in Thickness	± 10%	± 1.88%	ISO-10545-2
3	Straightness of Sides	± 0.5%	± 0.29%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.25%	ISO-10545-2
5	Surface Flatness	± 0.5%	± 0.17%	ISO-10545-2
5	Water Absorption	>10%	12.95%	ISO-10545-3
6	MOR	MInimum 15 N/mm3	17.51 N/mm3	ISO-10545-4
7	Breaking Strength	Not less than 200 N	508.36 N	ISO-10545-4
8	Surface Quality	Minimum 95%	100%	ISO-10545-2
9	Density (g/cc)	Minimum 2.2	2.2423 g/cc	ISO-10545-3
10	Chemical Resistance	Minimum Class B	Class GA (PASS)	ISO-10545-13
11	Crazing Resistance	2 cycle	2 cycle (PASS) Fully Resistance	ISO-10545-11
12	Thermal Shock Resistance	10 cycle	10 cycle (PASS) Fully Resistance	ISO-10545-9
13	Coefficient of Liner Thermal Expansion	Maximum 9 x 10 -6	5.45 x 10 -6	ISO-10545-8
14	Small colour differences (Plain Colour Tiles)	GL < 0.75	GL < 0.55	ISO-10545-16
15	Resistance to Staining	Min Class - 3	Class 4	ISO-10545-14
16	Resistance to Low Concentration of Acid & Alkali	Class GLA	Class GLA	ISO-10545-13
17	Resistance to Low Concentration of Acid & Alkali	Class GHA	Class GHA	ISO-10545-13
18	Household Chemical Resistance	Minimum Class B	Class GA	ISO-10545-13
19	Swimming Pool Salt	Minimum Class B	Class GA	ISO-10545-13
20	Lead and Cadmium Release	Maximum 0.1mg/dm2	0.016mg/dm2	ISO-10545-15

PACKAGING DETAILS

SIZE	TEXTURE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
75X300MM (3"X12")	CAPTIVA	8.00MM	44	0.99	10.66	13.300

Note :

- Size / shade variation is inherent in ceramic tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
 - Colour shown are indicative only. Check actual tiles for exact colour.
 - The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
 - The company reserves the right to change the specifications without prior notice.





RANGE CERAMIC PVT. LTD.

Opp. CNG Pump, Jetpar Road,
At. Bela, Morbi - 363 642, (Guj.) INDIA.

Call : +91 99786 04040 | +91 99786 44040

Mail : info@rangeceramic.com

www.rangeceramic.com
