



75X300MM

3X12 INCH
CERAMIC WALL TILE
HANDCRAFT (GLOSSY & MATT)

CERAMIC WALL TILE

75X300MM

WHERE MINIMALISM MEETS ENDLESS INSPIRATION

Glossy Surface


11 COLORS

Stunning collection of glossy surfaces Elevate your space with a touch of luminosity and create a captivating ambiance that exudes modern elegance.

Matt Surface

7 COLORS

Where understated beauty meets contemporary charm. Immerse yourself in a world of refined elegance Embrace a sense of tranquility and warmth as you create a space that exudes a subtle sophistication.

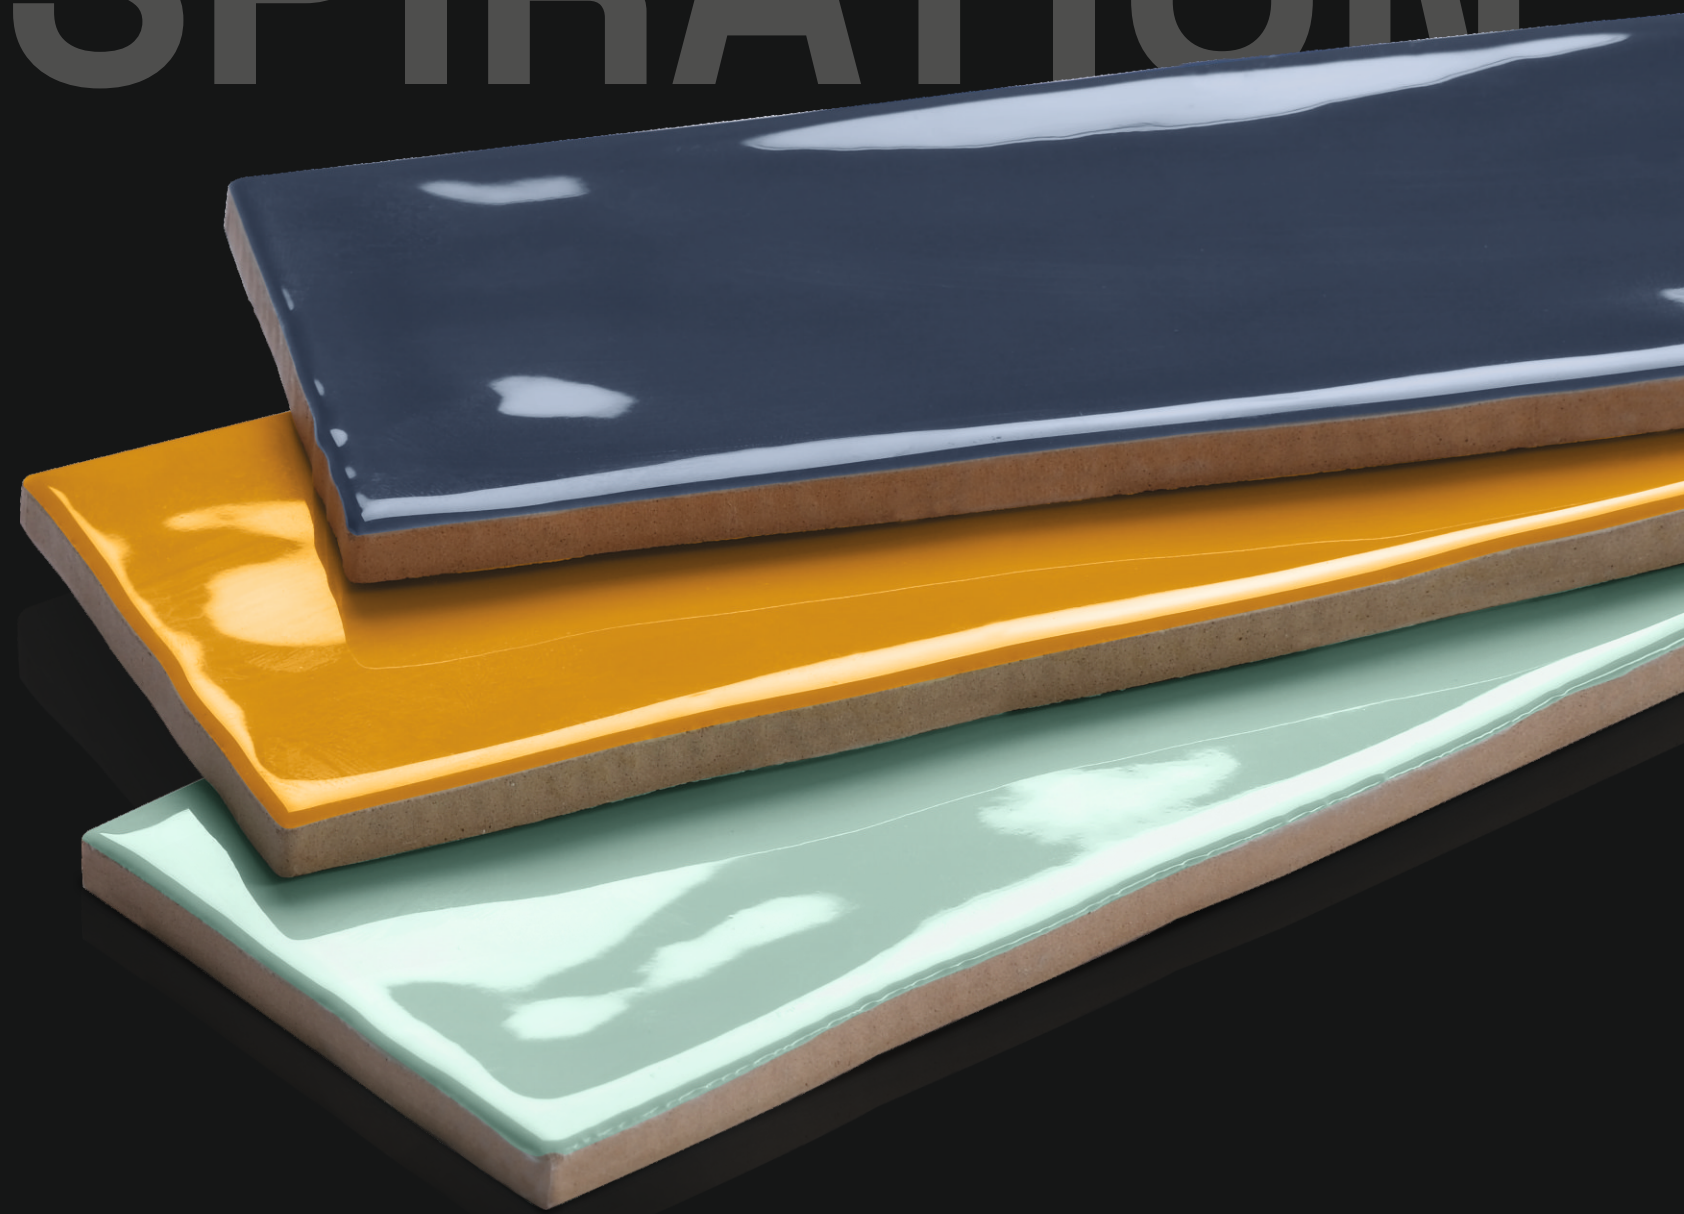

SIZE
75X300MM
3X12INCH



White



Grey



Anchor Grey



Black



Wine Red



Teal Blue



Teal Green



Royal Yellow



Magenta



Ice Blue



Mint Pista

SURFACE
GLOSSY

PUNCH
HANDCRAFT



WALL
TILE



White
Handcraft | Glossy



Black
Handcraft | Glossy

Mint Pista
Handcraft | Glossy





Teal Green
Handcraft | Glossy



Teal Blue
Handcraft | Glossy



Wine Red
Handcraft | Glossy




Magenta
Handcraft | Glossy



Royal Yellow
Handcraft | Glossy

Anchor Grey

Handcraft | Glossy

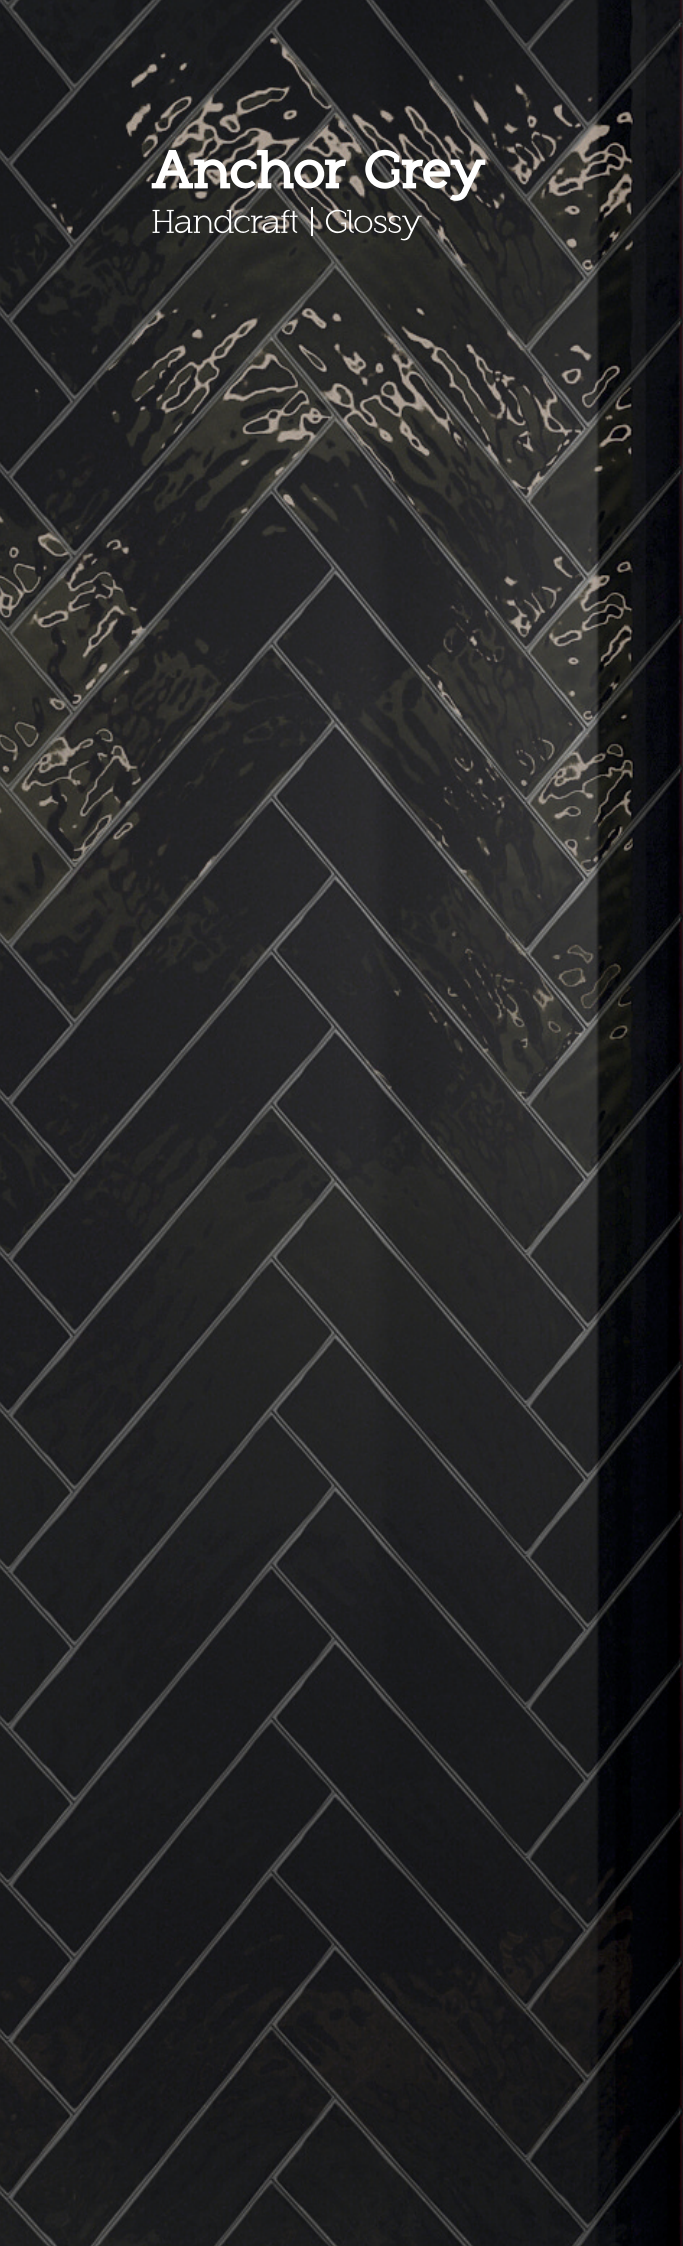

Ice Blue

Handcraft | Glossy



Grey

Handcraft | Glossy



SIZE
75X300MM
3X12INCH



White Matt



Grey Matt



Black Matt



Sweet Pink Matt



Mint Pista Matt



Ice Blue Matt



Morrado Matt



White Matt
Handcraft | Matt



Black Matt
Handcraft | Matt



Mint Pista Matt
Handcraft | Matt



Sweet Pink Matt
Handcraft | Matt

Ice Blue Matt
Handcraft | Matt



Grey Matt
Handcraft | Matt



Morrado Matt
Handcraft | Matt



TECHNICAL SPECIFICATION as per ISO 13006:2018 – ANNEXL

Sr.No.	Property	International Std.	OUR Tiles Value	Method of Testing
1	Deviation in Length and Width	± 0.6%	± 0.10%	ISO-10545-2
2	Deviation in Thickness	± 10%	± 1.88%	ISO-10545-2
3	Straightness of Sides	± 0.5%	± 0.29%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.25%	ISO-10545-2
5	Surface Flatness	± 0.5%	± 0.17%	ISO-10545-2
5	Water Absorption	>10%	12.95%	ISO-10545-3
6	MOR	MInimum 15 N/mm3	17.51 N/mm3	ISO-10545-4
7	Breaking Strength	Not less than 200 N	508.36 N	ISO-10545-4
8	Surface Quality	Minimum 95%	100%	ISO-10545-2
9	Density (g/cc)	Minimum 2.2	2.2423 g/cc	ISO-10545-3
10	Chemical Resistance	Minimum Class B	Class GA (PASS)	ISO-10545-13
11	Crazing Resistance	2 cycle	2 cycle (PASS) Fully Resistance	ISO-10545-11
12	Thermal Shock Resistance	10 cycle	10 cycle (PASS) Fully Resistance	ISO-10545-9
13	Coefficient of Liner Thermal Expansion	Maximum 9 x 10 -6	5.45 x 10 -6	ISO-10545-8
14	Small colour differences (Plain Colour Tiles)	GL < 0.75	GL < 0.55	ISO-10545-16
15	Resistance to Staining	Min Class - 3	Class 4	ISO-10545-14
16	Resistance to Low Concentration of Acid & Alkali	Class GLA	Class GLA	ISO-10545-13
17	Resistance to Low Concentration of Acid & Alkali	Class GHA	Class GHA	ISO-10545-13
18	Household Chemical Resistance	Minimum Class B	Class GA	ISO-10545-13
19	Swimming Pool Salt	Minimum Class B	Class GA	ISO-10545-13
20	Lead and Cadmium Release	Maximum 0.1mg/dm2	0.016mg/dm2	ISO-10545-15

PACKAGING DETAILS

SIZE	TEXTURE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
75X300MM (3"X12")	HANDCRAFT	8.00MM	44	0.99	10.66	13.300

Note :

- Size / shade variation is inherent in ceramic tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
 - colour shown are indicative only. Check actual tiles for exact colour.
 - The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
 - The company reserves the right to change the specifications without prior notice.

Exterior Elevation or interior Walls





RANGE CERAMIC PVT. LTD.

Opp. CNG Pump, Jetpar Road,
At. Bela, Morbi - 363 642, (Guj.) INDIA.

Call : +91 99786 04040 | +91 99786 44040

Mail : info@rangeceramic.com

www.rangeceramic.com
