



75X300MM

3X12 INCH

(GLOSSY)

SPLENDOR

CERAMIC WALL TILE


CERAMIC WALL TILE
75X300MM



BLANCO
1201




GRIGIO
1231

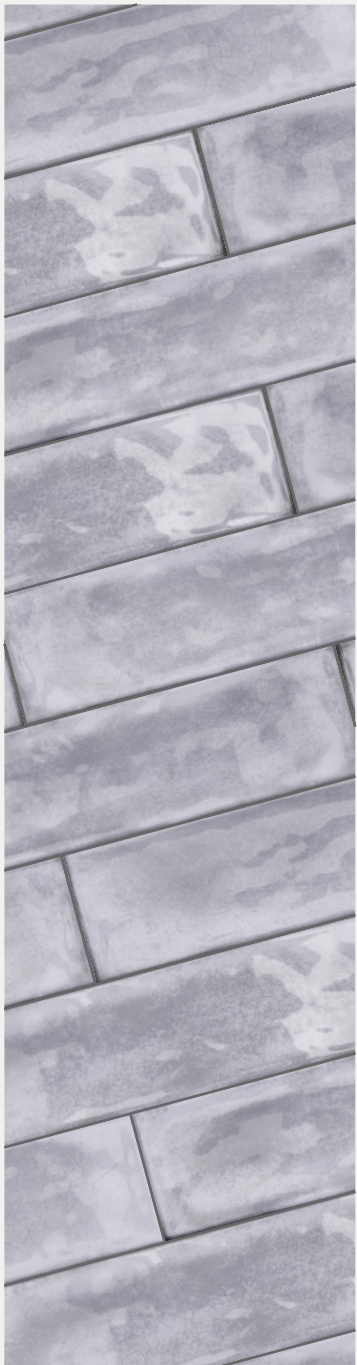


CREME
1261



VERDE
1271

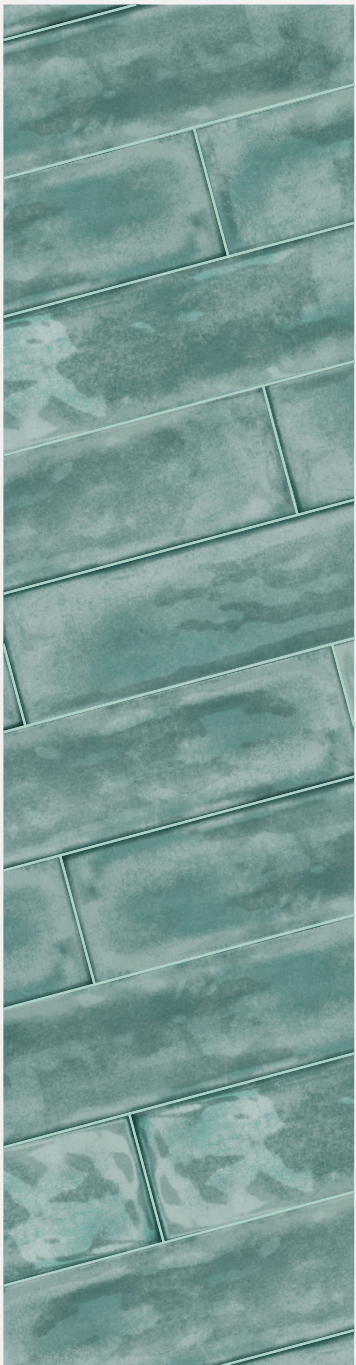

ACQUA
1281

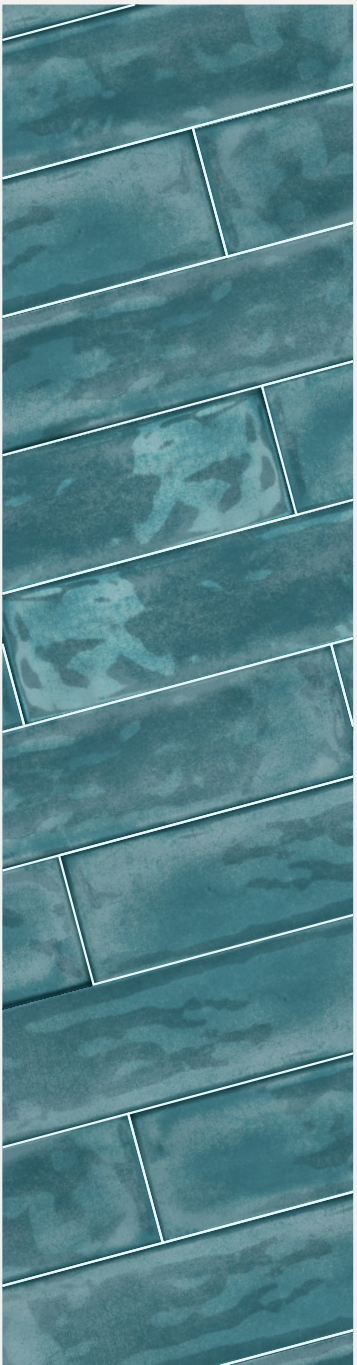

SPLENDOR


SPLENDOR

BLANCO 1201


75X300 MM

RANDOM

20

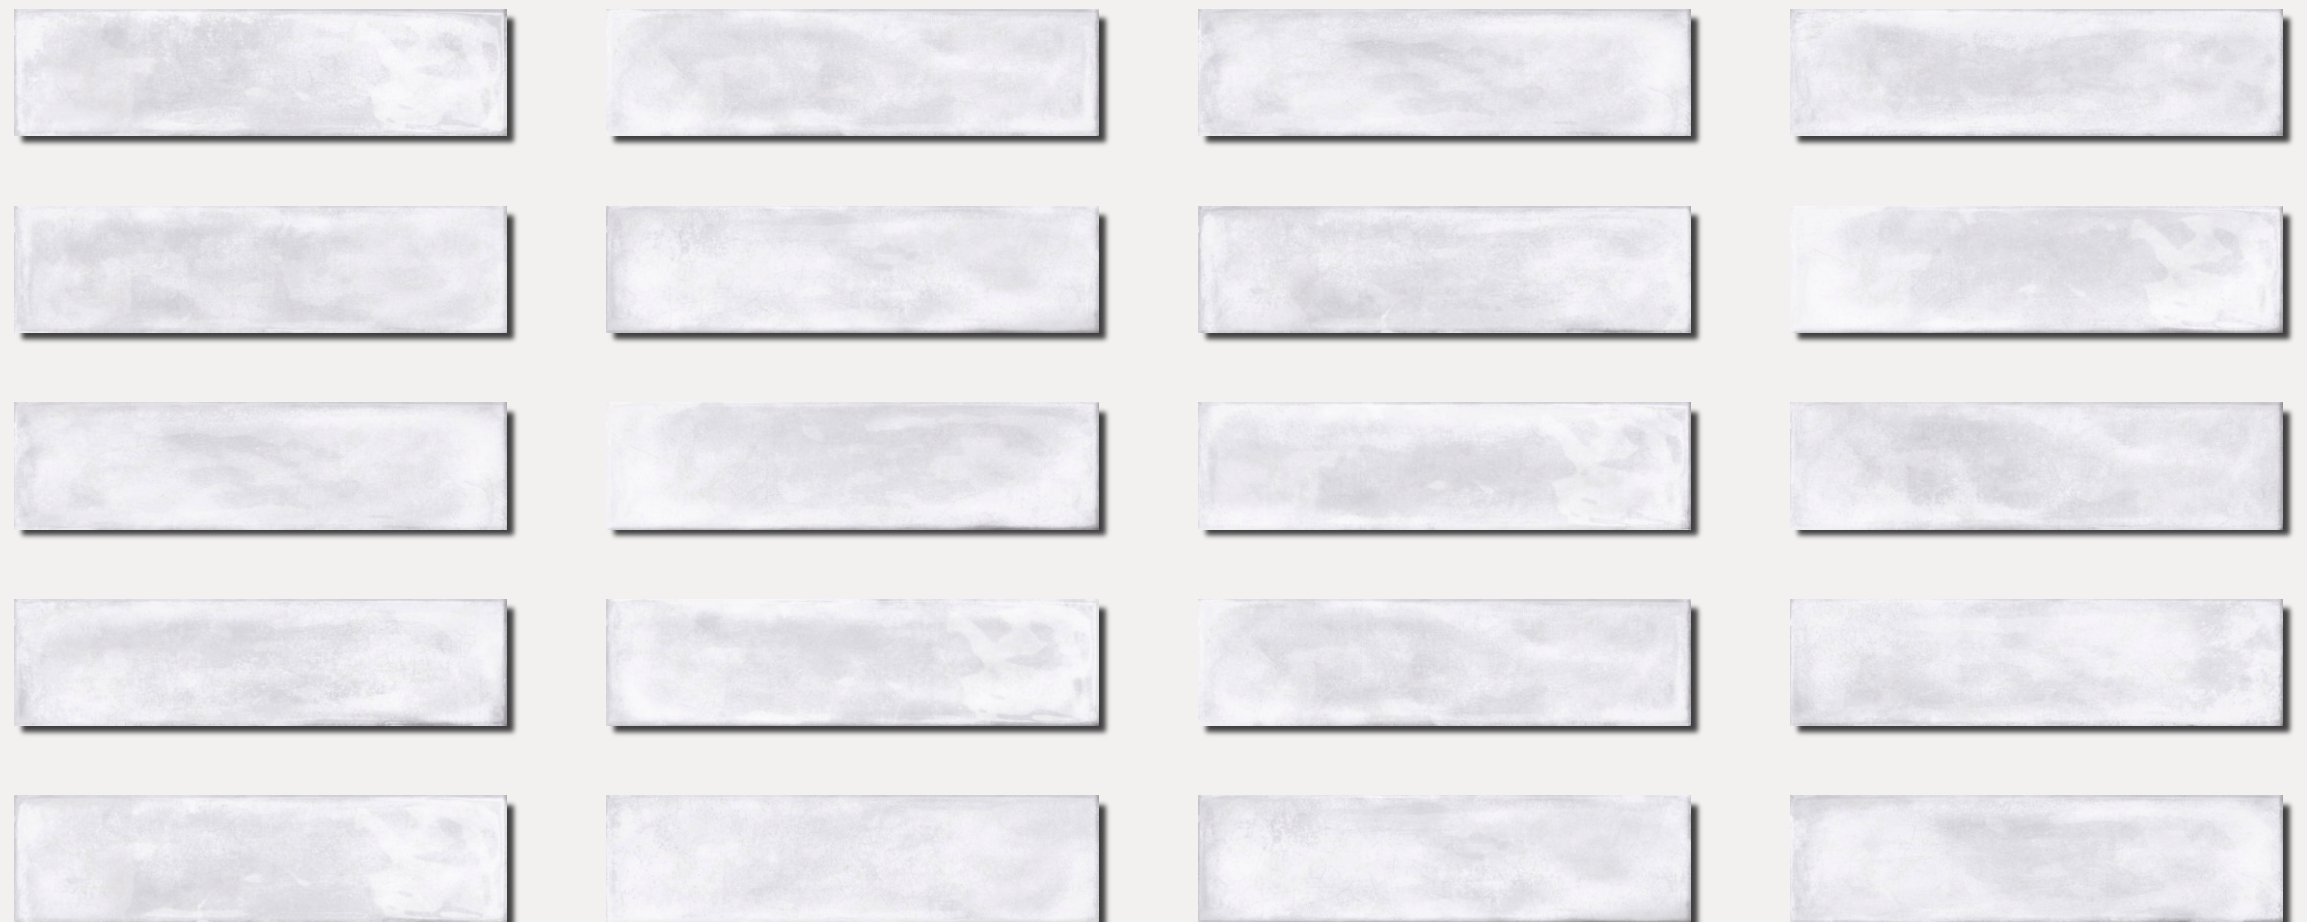

TEXTURES

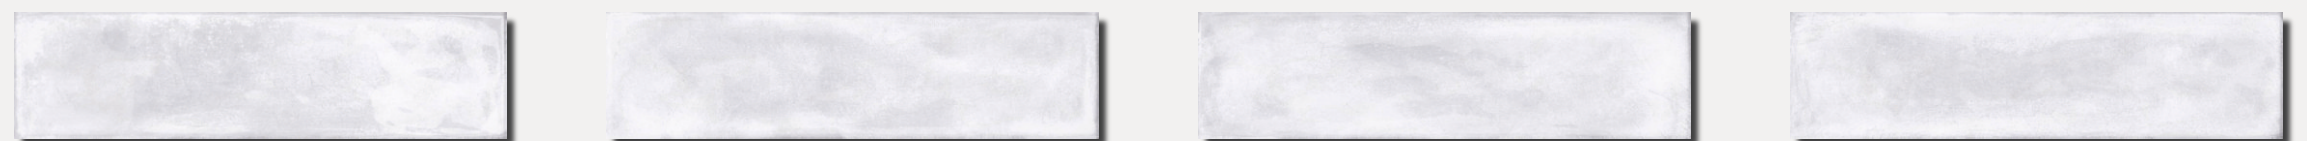

TEXTURE 01

TEXTURE 02

TEXTURE 03

TEXTURE 04




SPLENDOR

GRIGIO 1231

75X300 MM

RANDOM

20

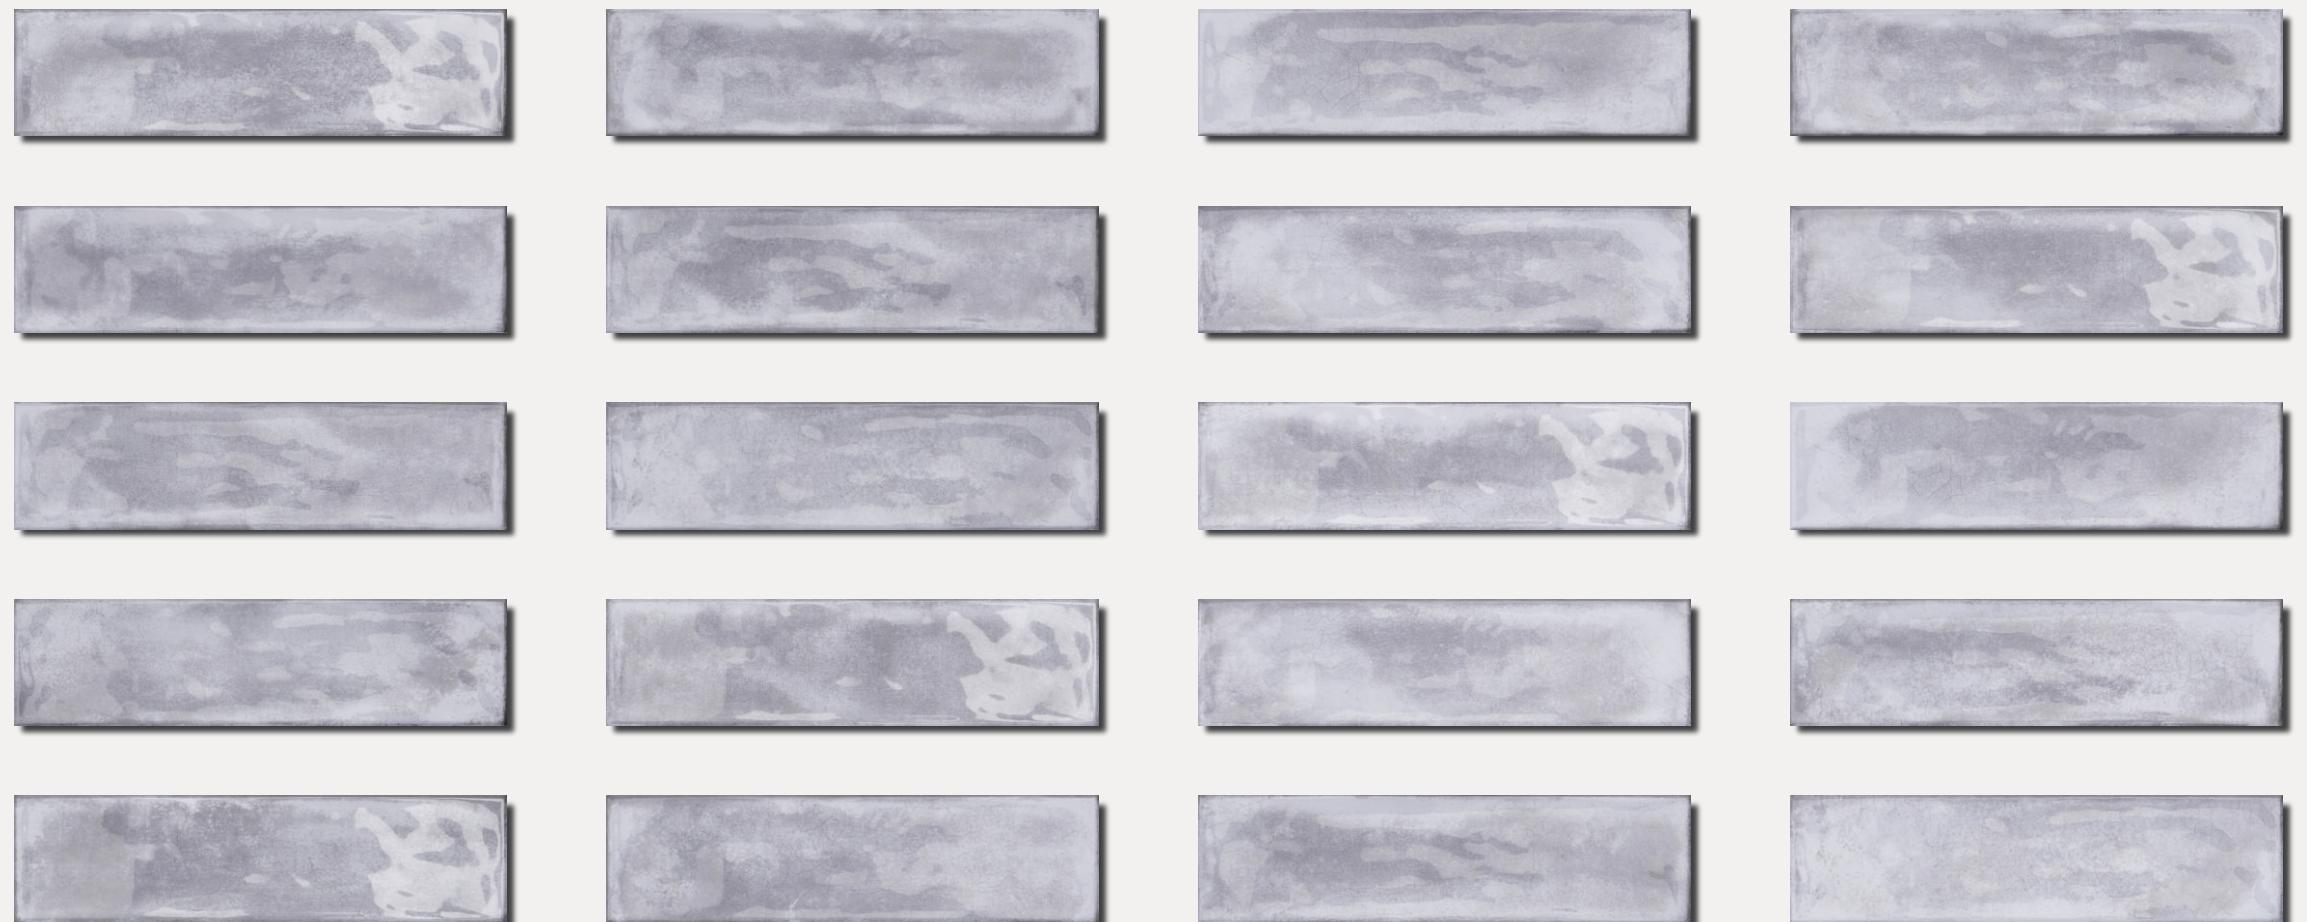

TEXTURES



TEXTURE 01

TEXTURE 02

TEXTURE 03

TEXTURE 04



SPLENDOR

CREME 1261

75X300 MM

RANDOM

20



TEXTURES



TEXTURE 01

TEXTURE 02

TEXTURE 03

TEXTURE 04




SPLENDOR

VERDE 1271

75X300 MM

RANDOM
20

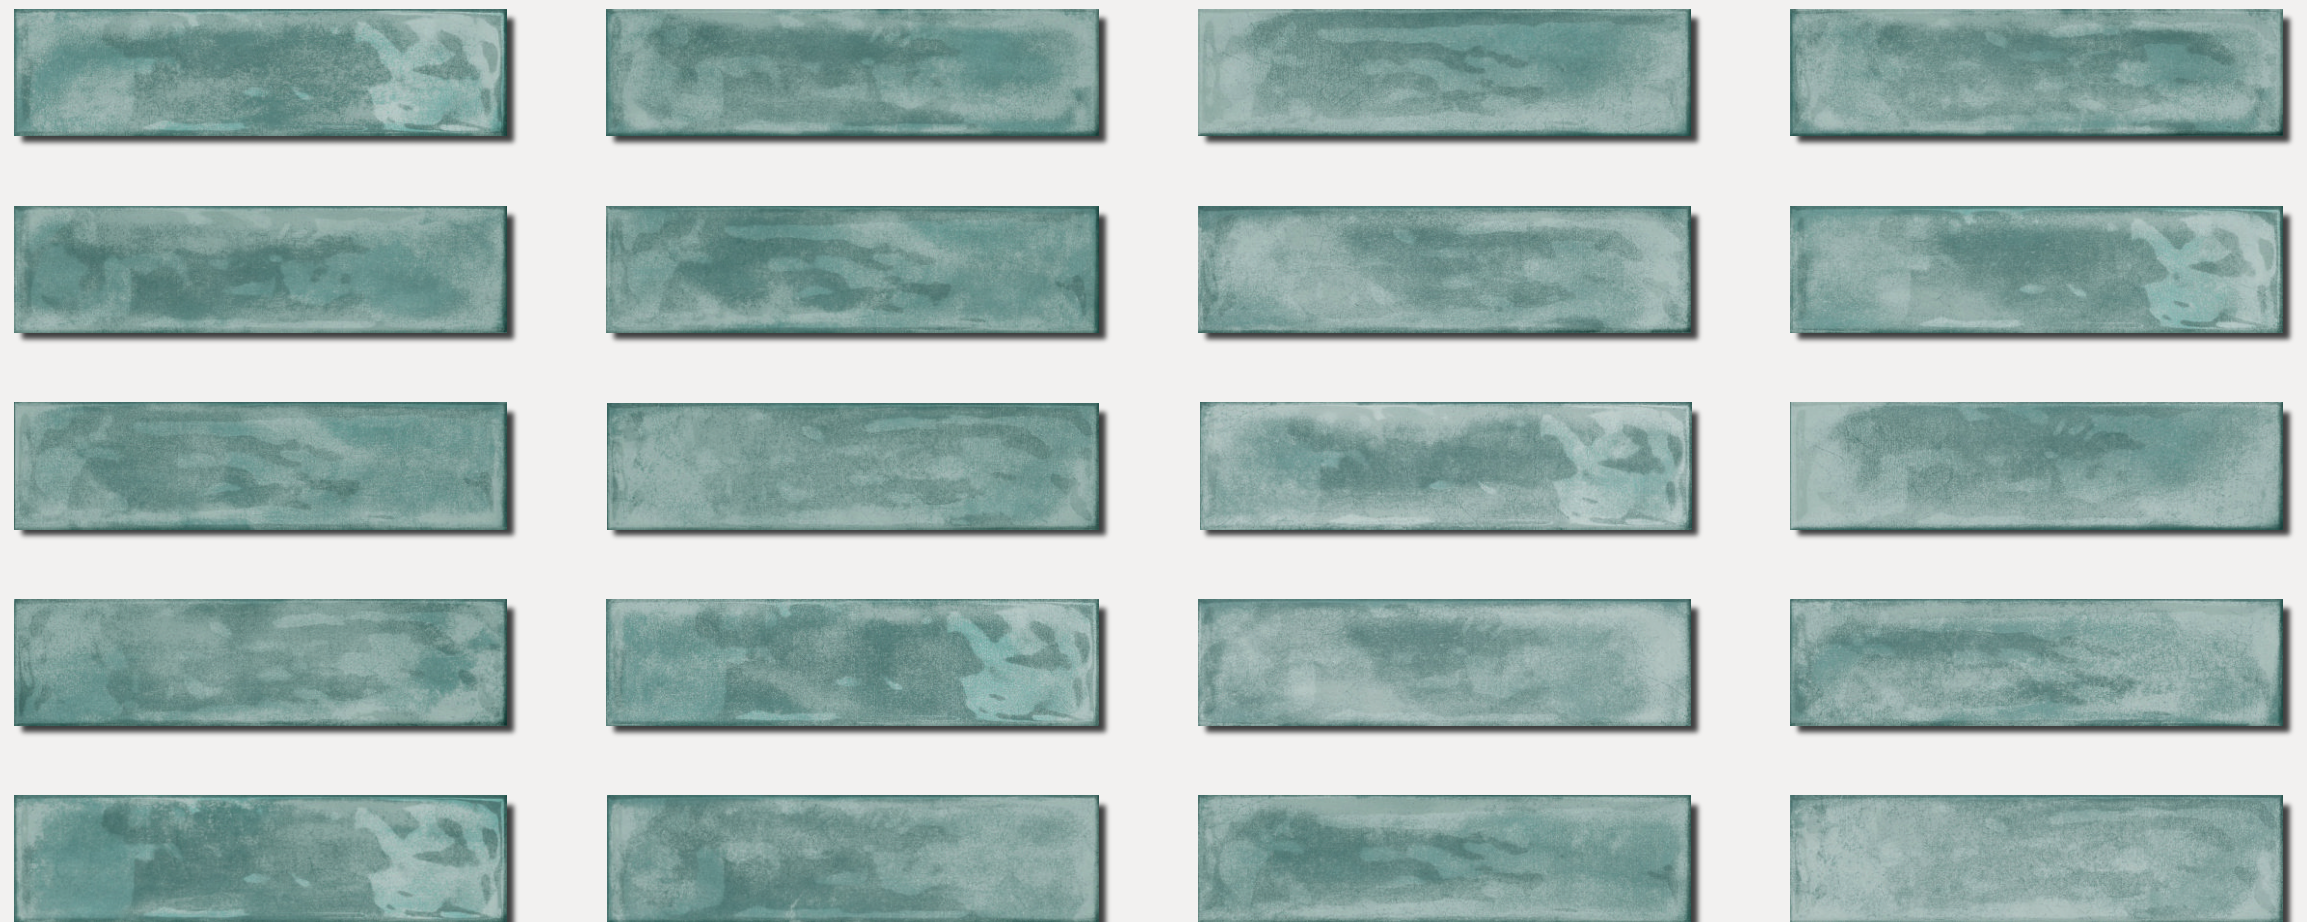

TEXTURES



TEXTURE 01

TEXTURE 02

TEXTURE 03

TEXTURE 04




SPLENDOR


ACQUA 1281

75X300 MM

RANDOM
20

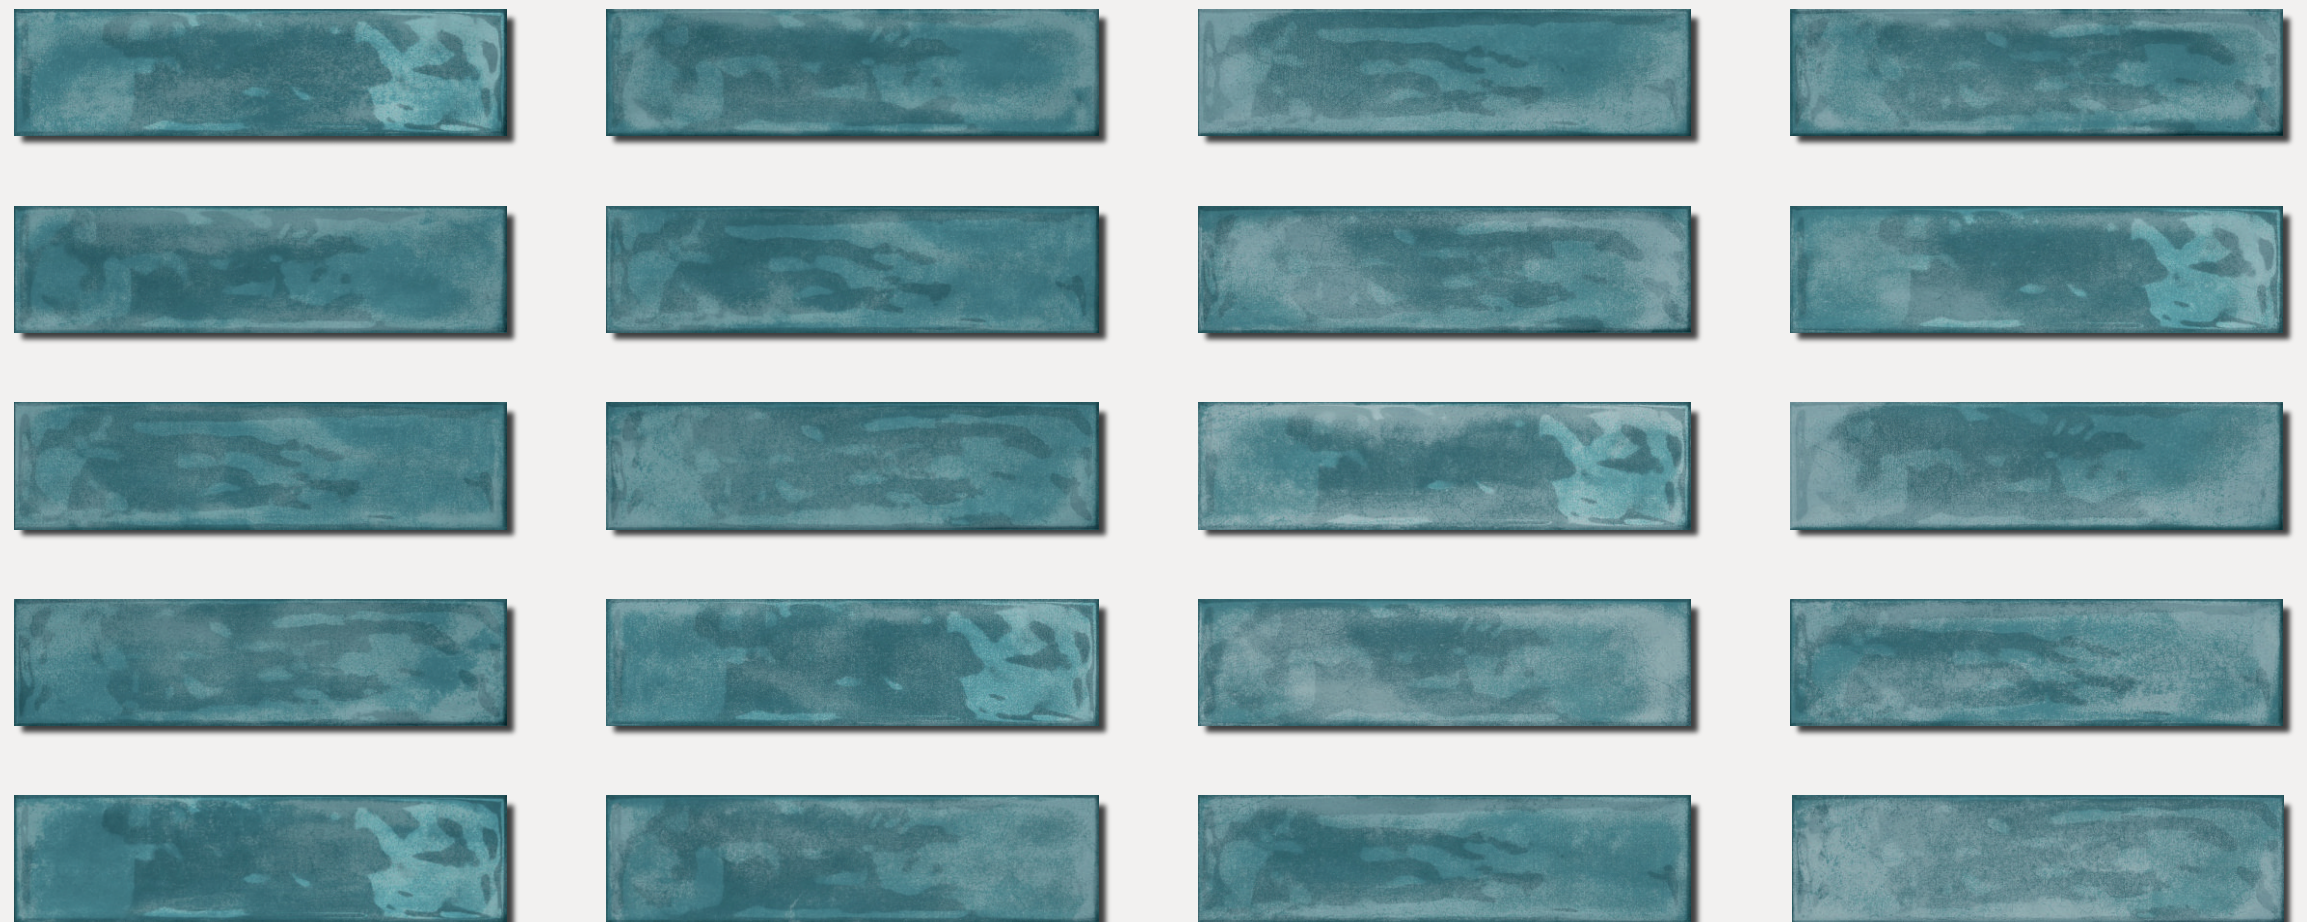

TEXTURES

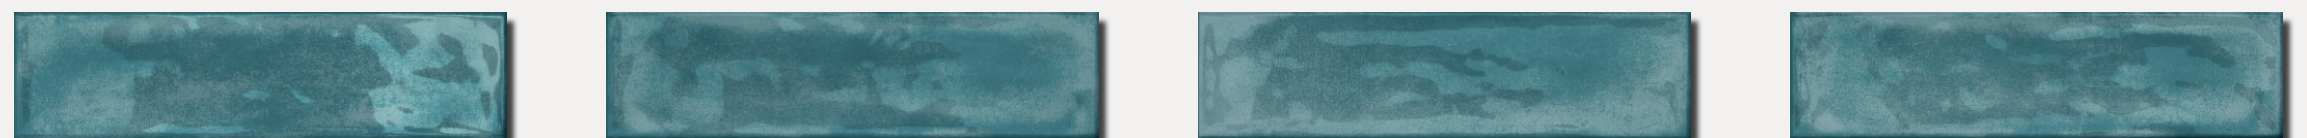

TEXTURE 01

TEXTURE 02

TEXTURE 03

TEXTURE 04



TECHNICAL SPECIFICATION as per ISO 13006:2018 – ANNEXL

Sr.No.	Property	International Std.	OUR Tiles Value	Method of Testing
1	Deviation in Length and Width	± 0.6%	± 0.10%	ISO-10545-2
2	Deviation in Thickness	± 10%	± 1.88%	ISO-10545-2
3	Straightness of Sides	± 0.5%	± 0.29%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.25%	ISO-10545-2
5	Surface Flatness	± 0.5%	± 0.17%	ISO-10545-2
5	Water Absorption	>10%	12.95%	ISO-10545-3
6	MOR	MInimum 15 N/mm3	17.51 N/mm3	ISO-10545-4
7	Breaking Strength	Not less than 200 N	508.36 N	ISO-10545-4
8	Surface Quality	Minimum 95%	100%	ISO-10545-2
9	Density (g/cc)	Minimum 2.2	2.2423 g/cc	ISO-10545-3
10	Chemical Resistance	Minimum Class B	Class GA (PASS)	ISO-10545-13
11	Crazing Resistance	2 cycle	2 cycle (PASS) Fully Resistance	ISO-10545-11
12	Thermal Shock Resistance	10 cycle	10 cycle (PASS) Fully Resistance	ISO-10545-9
13	Coefficient of Liner Thermal Expansion	Maximum 9 x 10 -6	5.45 x 10 -6	ISO-10545-8
14	Small colour differences (Plain Colour Tiles)	GL < 0.75	GL < 0.55	ISO-10545-16
15	Resistance to Staining	Min Class - 3	Class 4	ISO-10545-14
16	Resistance to Low Concentration of Acid & Alkali	Class GLA	Class GLA	ISO-10545-13
17	Resistance to Low Concentration of Acid & Alkali	Class GHA	Class GHA	ISO-10545-13
18	Household Chemical Resistance	Minimum Class B	Class GA	ISO-10545-13
19	Swimming Pool Salt	Minimum Class B	Class GA	ISO-10545-13
20	Lead and Cadmium Release	Maximum 0.1mg/dm2	0.016mg/dm2	ISO-10545-15

PACKAGING DETAILS

SIZE	TEXTURE	THICKNESS	PIECES/BOX	SQM./BOX	SQFT./BOX	KG/BOX
75X300MM (3"X12")	SPLENDOR	8.00MM	44	0.99	10.66	13.300

Note :

- Size / shade variation is inherent in ceramic tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
 - Colour shown are indicative only. Check actual tiles for exact colour.
 - The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
- Customers are advised to inspect a sample of the tile before ordering.
 - The company reserves the right to change the specifications without prior notice.





RANGE CERAMIC PVT. LTD.

Opp. CNG Pump, Jetpar Road,
At. Bela, Morbi - 363 642, (Guj.) INDIA.

Call : +91 99786 04040 | +91 99786 44040

Mail : info@rangeceramic.com

www.rangeceramic.com
